

LINEAR





MOTOR FREE
PISTON SYSTEM



Ac0201A

Airflow & Power Consumption


Specifications

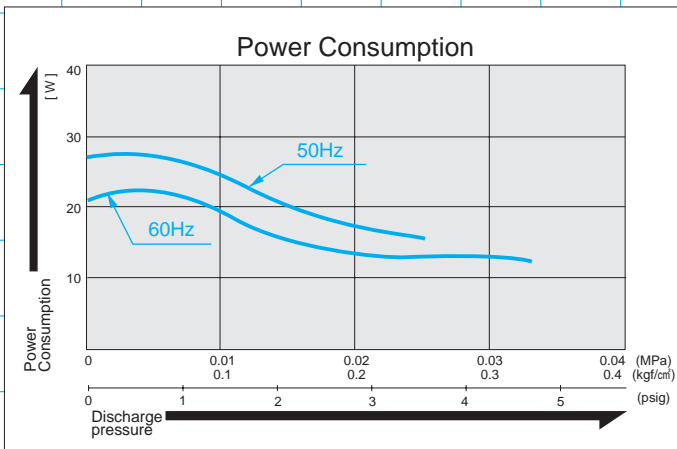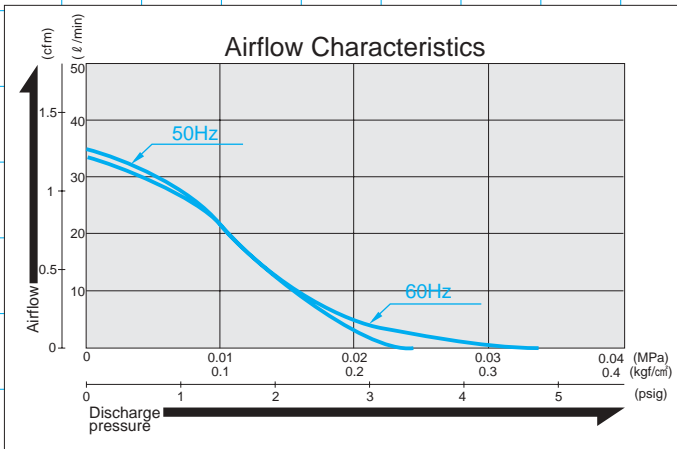


	(SI)	(EURO)	(U.S.A.)
Rated Pressure	0.01 MPa {0.1 kgf/cm ² }	0.1 bar	1.42 psig
Rated Airflow	20 l / min		0.71 cfm
Rated Voltage	115 V, AC or 230 V, AC		
Maximum Pressure	0.02 MPa {0.2 kgf/cm ² }	0.2 bar	2.84 psig
Power Consumption	19 W or 23 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	6,000 hours		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) and B for UL		
Mounting Dimensions	73 (L) x 88 (W) mm		
Gross Weight	1.5 kg	3.3 Lbs.	
Leadwire Length	200 mm	7-7/8"	

* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

Application Examples

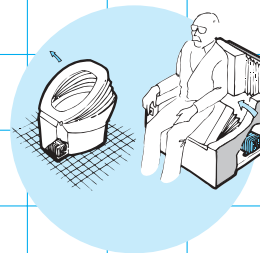

Seat Lifter



Bed Sore Prevention Mattress

Sketch Drawing and Mounting Dimensions Diagram (mm)

