

VACUUM PUMP

LINEAR

vp0435A




MOTOR FREE
PISTON SYSTEM



Airflow & Power Consumption


Specifications

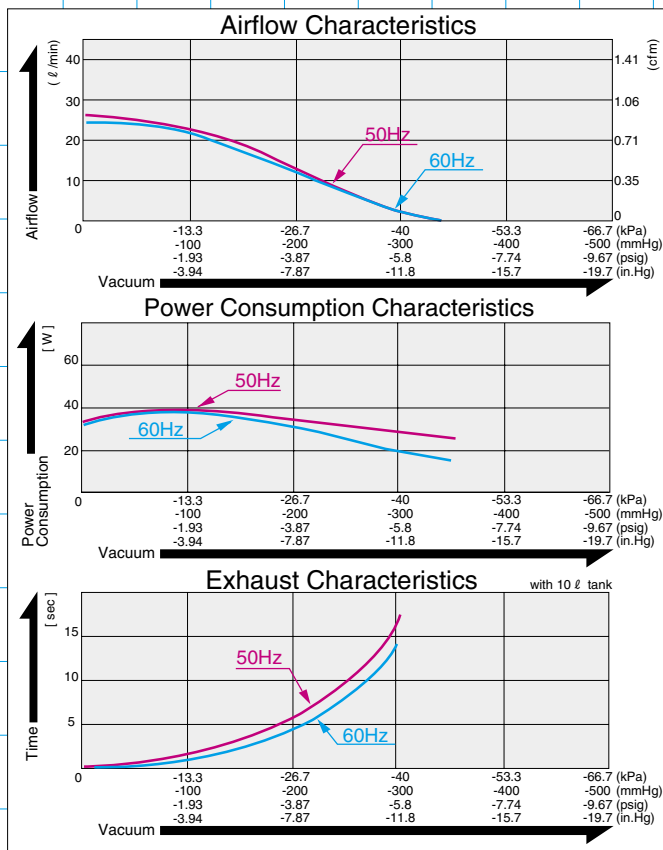


| | (SI) | (EURO) | (U.S.A.) |
|-----------------------|---------------------------------|----------------------------|--------------|
| Attainable Vacuum | -46.7 kPa (-350 mmHg) | -467 mbar | -13.78 in.Hg |
| Free Air Displacement | 25 l/min | | 0.88 cfm |
| Rated Voltage | 115 V AC or 230 V AC | | |
| Power Consumption | 39 W | | |
| Rated Frequency | 60 Hz or 50 Hz | | |
| Life Expectancy | 3,000 hours | | |
| Inlet | ISO Rc 1/4 (female threaded) | | |
| Outlet | ISO Rc 1/4 (female threaded) | | |
| Duty Cycle | Continuous | | |
| Coil Insulation Class | B or its equivalent (JETL) / UL | | |
| Mounting Dimensions | 68 (L) x 84 (W) mm | 2-11/16" (L) x 3-5/16" (W) | |
| Gross Weight | 2.3 kg | 5.1 Lbs. | |
| Leadwire Length | 200 mm | 7-7/8" | |

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples



Machine Screw Feeder



Medical Cup Suction

Sketch Drawing and Mounting Dimensions Diagram (mm)

