

LINEAR

VP0450






MOTOR FREE
PISTON SYSTEM



Airflow & Power Consumption


Specifications

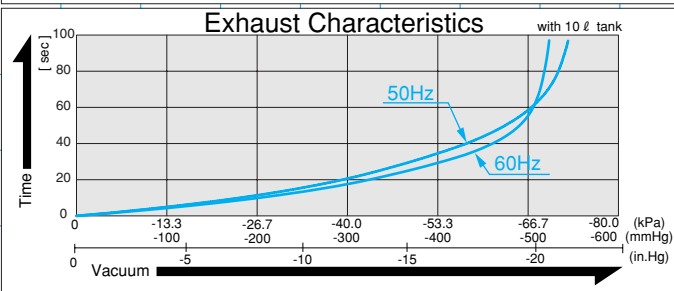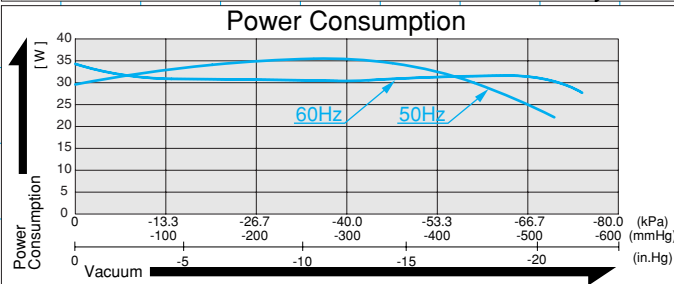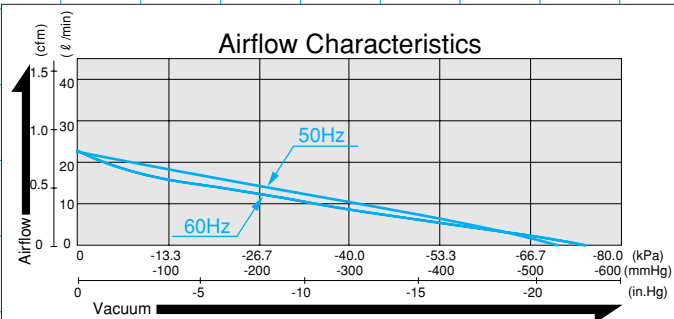


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-66.7 kPa (-500 mmHg)	-667 mbar	-19.7 in.Hg
Free Air Displacement	18 l/min		0.64 cfm
Rated Voltage	120 V, AC or 230 V, AC		
Power Consumption	34 W or 35 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Inlet	ISO Rc 1/4 (female threaded)		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL)		
Mounting Dimensions	85 (L) x 88 (W) mm		
Gross Weight	2.2 kg		4.8 Lbs.
Leadwire Length	300 mm		11-13/16"

* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

Application Examples



Machine Screw Feeder



Medical Cup Suction

Sketch Drawing and Mounting Dimensions Diagram (mm)

